

### REMARKS

Applicants request reconsideration of the application in view of the present Reply.

#### 35 USC 102(e)

The Final Office Action imposes a 102(e) rejection over U.S. Patent No 6,426,266 to Senkan. The present application claims foreign priority of German Patent Application DE 10012847.5 filed March 16, 2000. The Advisory Action indicates that this foreign priority document cannot be relied upon to overcome the 102(e) rejection over Senkan, because a translation of the document has not been made of record in accordance with 37 CFR 1.55.

Accordingly, an English translation of the prior document is submitted with this Reply, together with a Certificate stating that the translation is accurate. Senkan is therefore not prior art under 35 USC 102(e), and the 35 USC 102(e) rejection should be withdrawn.

#### 35 USC 103(a)

Each of claims 39-76 requires a second sensor to measure a further parameter in a material library.

Willson does not suggest the claimed second sensor. Nor does he suggest measuring a further, i.e. different, parameter than the first parameter. Fawcett, who uses three analytical techniques to evaluate a single sample, does not suggest their use for Willson's material library. And, as indicated in the Advisory Action, the Examiner does not assert that Fawcett's techniques are to replace those of Willson.

In the absence of hindsight provided by the present application, the skilled person would not consider adding, to a material library, a second sensor to measure a further parameter. That is because, due to the complexity already inherent in having multiple samples in a material library, the skilled person would be dissuaded from further complicating it with an additional sensor and with measuring a further parameter. Even if the skilled person were to add a second sensor to Willson's material library, he would find no motivation in Willson for that second sensor to measure a "further", i.e. different, parameter as claimed. The skilled person would rather add a second sensor to re-measure the same parameter as the first to, for example, replicate the initial results.

Therefore, claims 39-76 are nonobvious over Willson even in view of Fawcett.

Applicants respectfully submit that the application is now in condition for allowance, and allowance is requested.

Respectfully submitted,

*Mitchell Rose*

Mitchell Rose, Patent Agent  
Registration No. 47,906  
JONES DAY  
901 Lakeside Ave.  
Cleveland, OH 44114  
(216)586-7094

Date: 4/8/2004

H32923US

**CERTIFICATE**

I, Dr. Holger Tostmann, patent assistant

of

Jones Day

Rechtsanwälte, Attorneys-at-Law, Patentanwälte


Prinzregentenstrasse 11

80538 München

DE

do hereby certify that I am well acquainted with the German and English languages and I am a competent translator thereof, and that the attached translation is a true translation to the best of my knowledge and belief into the English language of the German patent No. 100 12 847.5.

Date: April 6, 2004

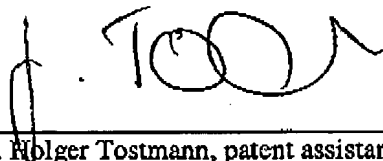

---

Dr. Holger Tostmann, patent assistant

-1-

## ENGLISH TRANSLATION OF FOREIGN PRIORITY APPLICATION DE 10012847.5

---

**Process and apparatus for the combinatorial production and testing of  
material libraries by using at least two analytical methods**

---

5

The present invention relates to a process for the combinatorial production of material libraries and testing of the same using at least two analytical methods and to an apparatus for carrying out this process.

10 Combinatorial methods have been for some time the centre of interest of research and development in the field of material research. Using these combinatorial methods, as great a number as possible of different or identical chemical compounds are always prepared and thus a material library is produced which are then investigated for useful properties using a suitable method. In  
15 addition to magnetic, electronic, electromagnetic, optical, electrooptical, electro-mechanical properties etc., interest also centres on catalytical properties of such materials prepared by combinatorial or highly parallel methods. In this context we refer to WO 99/41005 and the prior art cited therein. This publication relates to arrays of heterogeneous catalysts and/or their precursors, built up from a body  
20 which has preferably parallel continuous channels and in which at least  $n$  channels contain  $n$  different heterogeneous catalysts and/or their precursors, where  $n$  has the value 2, preferably 10, particularly preferably 100, in particular 1000, especially 10,000. Furthermore, the publication relates to a process for preparing such arrays and to a process for determining the activity, selectivity and/or long-term stability  
25 of catalysts in such an array.

Relatively large material libraries can be studied simply by analysing the heat produced in the reaction. According to WO 97/32208, WO 98/15813 and Ind. Eng. Chem. Res. 1996, 35, pp. 4801-4803, an entire material library is studied for its useful properties using a thermosensitive camera. The  
30 disadvantage of the method is essentially that the thermosensitive camera reflects via the heat set free only the degree of activity of the catalysts. For a number of reactions this information is sufficient (complete oxidations, complete hydrations etc.) (see, inter alia, Holzwarth, A., Schmidt, H.W., Maier, W.F., Angewandte

- 2 -

Chemie, 1998, 110, 19, 2788-2791; Reetz, M.T., Becker, M.H., Holzwarth, A., Angewandte Chemie, 1998, 110, 19, 2792-2795), but in other reactions, especially what are termed partial oxidations of hydrocarbons, to evaluate catalytic properties of a building block of a material library information on activity alone is not  
5 sufficient, since the selectivity of the building block in such reaction types generally plays a greater role than the activity.

WO 97/32208 refers in general terms without a more detailed disclosure to the fact that the detector of the apparatus can further comprise Raman spectroscopy, FT-IR spectroscopy, NMR, mass spectroscopy, gas chromatography,  
10 liquid chromatography and enzymatic or biological additions, etc.

Mass spectrometry, owing to its high sensitivity, has long occupied a position in the field of organic and pharmaceutical combinatorial chemistry. Recent work by Weinberg et al. demonstrates the possibility of employing mass spectrometric methods for high-speed screening of heterogeneous catalyst libraries  
15 (P. Cong, R.D. Doolen, Q. Fan, D.M. Giaquinta, S.Guan, E.W. McFarland, D.M. Poojary, K. Self, H.W. Turner, W.H. Weinberg, Angew. Chem. 111 (1999) 507; US 5 959 297, WO 98/15969 A2, W.H. Weinberg, E.W. McFarland, P.Gong, S. Guan, Symyx Technologies, 1998; R.F. Service, Science 280 (1998) 1690). Weinberg and collaborators detect the CO<sub>2</sub> formed and the starting gases by mass  
20 spectrometry in the oxidation of CO by O<sub>2</sub> or NO on metal alloys of Rh, Pd, Pt and Cu. For this purpose they use a capillary bundle for spatially separated starting material feed and product removal in the form of a quartz capillary which is coupled to a mass spectrometer. Taking into account the method of synthesizing ternary metal alloys via radiofrequency cathode atomization and the use of various  
25 mask systems (US 5 985 356, US 6 004 617, WO96/11878, P.G. Schultz, X. Xiang, I. Goldwasser, Symyx Technologies, 1996), it can be seen how the above-cited patent literature also describes that the actual structure is much more complicated than the very schematic description in the publications. For catalyst amounts of from 2 to 4 µg on a catalyst element of 1.5 mm in diameter, even at  
30 conversion rates of from 80 to 90% and high selectivities, as is the case in the oxidation of CO, only very small amounts of product are formed. Thus a complex modification of the mass spectrometer with a second quadrupole mask ("ion guide") and the construction of a vacuum chamber system for separate analysis, sample pretreatment and actual testing are required. Especially, handling samples

- 3 -

from the outside is made very difficult. In this example also differentiation can actually only be seen via catalyst activities, the oxidation of CO by O<sub>2</sub> or NO to form CO<sub>2</sub> as the sole possible reaction product provides no information on the selectivity differences in the individual library members. In more complex reactions having a plurality of possible products which are frequently formed at low yields with different or similar selectivities, this method fails owing to the too small amounts of product.

Overall, the method of Weinberg et al. requires high financial expenditure and much equipment. The conditions of the catalytic testing and catalyst production must be termed highly idealized and remote from technically relevant conditions. The transferability and use of the results obtained on a laboratory scale is questionable. Overall, the method demonstrates, however, the applicability in principle of mass spectrometry in combinatorial solid-state research.

In addition to Symyx, Maier and collaborators also describe a system for the mass-spectrometric scanning of libraries of heterogeneous catalysts (M. Orschel, J. Klein, W.F. Maier, *Angewandte Chemie*, 1999, 111, 18, 2961). This very simple process for the spatially resolved determination of catalytic activities and selectivities using mass spectrometry results from coupling an automated synthesis machine to a commercial gas analyser. It is shown that using a suitable arrangement of feed and measuring capillaries different selectivities of heterogeneously catalysed reactions on a catalyst library open to the outside can be reliably and rapidly studied in a spatially resolved manner. Using as example the selective oxidation of propene with atmospheric oxygen at temperatures of from 250 to 450°C, the selective formations of acrolein, benzene and 1,5-hexadiene can be assigned to different catalyst materials. This arrangement is characterized by the use of relatively large amounts of catalyst (from 1 to 2 mg) in contrast to Symyx and by the fact that an open system is employed (operating under atmospheric pressure, generation of "microreactors" by attaching a capillary bundle of starting material feed and product removal). However, in this case also the overflow principle corresponds only remotely to actual reaction conditions resembling those in industry. If a large material library is scanned completely, the time factor due to the sequential measurement of each individual measuring building block is virtually unacceptable; in addition, the catalysts, owing to the integral heating of

- 4 -

the overall library, are exposed to very different thermal conditions, depending on whether they are tested at the beginning or at the end of a run. In comparison with parallel simultaneous recording of an entire library in IR thermography, mass-spectrometric sequential scanning must be classified as a very slow method. On p.  
5 2965 at the end of this article, there is also a reference to the possibility of combining mass spectrometry and IR thermography without any details being disclosed in this regard.

In view of the above-described prior art, the object underlying the present invention was to provide a process and an apparatus for determining useful  
10 properties of individual building blocks of a material library which do not have the disadvantages of the methods previously used in the analysis of such material libraries and, in addition, provide in a simple and rapid manner information on useful properties, preferably catalytic properties, in this case in particular activity and selectivity, of building blocks of a material library.

15 These and other objects are achieved by

a process for determining useful properties of individual building blocks of a material library comprising a substrate having at least two individual building blocks in at least two sections which are separated from one  
20 another which comprises:

(iii) simultaneous measurement of at least one first parameter at at least two, preferably all, sections with a first sensor, the first parameter giving an indication of a first property of the  
25 respective building blocks, and

(iv) measurement of at least one further parameter with at least one further sensor, the further parameter giving an indication of a further property of the respective building blocks.

30

In a particularly preferred embodiment, the at least one further parameter is measured only for a selected group of sections, the choice of a section for measuring the second parameter depending on the respective result of the measurement of the first parameter.

- 5 -

The present invention further relates to a process which, in addition to the above-mentioned steps, comprises the following further preceding step (i):

- 5 (i) production of a material library comprising a substrate having at least two individual building blocks in at least two different substrate sections which are separated from one another;

and a process which comprises the following further step (ii) before step (iii) and, if it is carried out, after step (i):

- 10 (ii) introduction of at least one starting material into at least two substrate sections which are separated from one another of a material library for carrying out a chemical or physical or chemical and physical conversion of the starting material in  
15 the at least two substrate sections separated from one another, in each case in the presence of the corresponding building block, comprising in each case an effluent stream comprising at least one conversion product and/or starting material.

20 The invention further relates to an apparatus for carrying out the above processes comprising:

- 25 (1) means for receiving at least two individual building blocks comprising a substrate having at least two different sections separated from one another,
- (2) means for introducing at least one starting material,
- (3) a first sensor for measuring a first parameter,
- 30 (4) at least one further sensor for measuring at least one further parameter, wherein



- 6 -

the apparatus further comprises a data processing device which selects the sections for measuring the second parameter on the basis of the results of measurement of the first parameter according to predefinable criteria.

5           According to one aspect of the invention, the material library relates to catalysts. The first sensor in this aspect is preferably an infrared camera which records as first parameter the temperature development of at least two, preferably at least 30% of, further preferably at least 50% of, and in particular all, sections simultaneously, the respective temperature changes of these sections being a  
10   measure of the activity of the building blocks contained in the sections. Preferably, only those sections are chosen for measuring the at least one further parameter in which the extent of the temperature change indicates a sufficient activity. The at least one further sensor is according to this aspect a spectroscopic sensor which, as a further parameter, provides data with respect to selectivity. Analytical methods  
15   of this type can be: GC, MS, GC/MS, Raman spectroscopy and other suitable methods. Preferably, the further sensor is a mass spectrometer, in particular a quadrupole mass spectrometer.

          Preferably, the inventive process is carried out in such a manner that two parameters are determined, further preferably in a manner as described above, in  
20   particular using an infrared camera as first sensor and a mass spectrometer as second sensor.

          The term "material library" used in the context of the present invention describes here an arrangement of at least two, preferably up to 10, further preferably up to 100, in particular up to 1000 and further preferably up to 100,000,  
25   building blocks which are situated in at least two different substrate sections which are separated from one another.

          The term "building block" describes a single defined unit which is situated in the respective substrate sections which are separated from one another and which single defined unit can consist of one or more components.

30           The term "substrate" comprises in principle all devices having a rigid or semirigid surface which can be either flat or have depressions or boreholes or channels. The substrate must be suitable for physically separating from one another the at least two individual building blocks in the at least two different sections which are separated from one another. The building blocks can be

- 7 -

disposed in the substrate one-, two- or three-dimensionally, that is to say next to one another and one above the other in various planes.

Preferably the substrate comprises continuous channels in parallel and can have, inter alia, a wire grid or foamed ceramic.

5 Further preferably it is a tube-bundle reactor. The geometric arrangement of the individual sections with respect to one another can be chosen freely in this case. For example, the sections can be arranged in the manner of a row (quasi one-dimensionally), a chessboard pattern or honeycomb-like (quasi two-dimensionally). In the case of a substrate having parallel continuous channels,  
10 preferably a tube-bundle reactor having a multiplicity of tubes parallel to one another, the arrangement becomes clear when considering a cross-sectional area perpendicular to the longitudinal axis of the tubes: a surface results in which the individual tubular cross sections reflect the different regions at a distance from one another. The sections or tubes can, for example for tubes having a circular cross  
15 section, also be present in a dense packing, so that different rows of sections are disposed offset from one another.

The term substrate describes a three-dimensional object which has a multiplicity (at least two) of "sections". Preferably, these sections are tubes, but they can also be individual sections physically separated from one another of a  
20 substrate which is flat or has depressions, for example in the form of a spotting plate. Preferably, the sections are constructed as channels. The channels thus connect two surface regions of the substrate and run through the substrate. Preferably, the channels are essentially, preferably completely, parallel to one another. The substrate in this case can be made up of one or more materials and  
25 can be massive or hollow. It can have any suitable geometric shape. Preferably it has two surfaces which are parallel to one another, in each of which there is an opening of the channels. The channels in this case preferably run perpendicularly to these surfaces. An example of a substrate of this type is a parallelepiped or cylinder in which the channels run between two parallel surfaces. However, a  
30 multiplicity of similar geometries is also conceivable.

The term "channel" describes a connection running through the substrate between two openings present on the body surface, which connection permits, for example, the passage of a fluid through the body. The channel can have any desired geometry in this case. It can have a cross-sectional area which is variable

- 8 -

over the length of the channel or it can preferably have a constant channel cross-sectional area. The channel cross section can have, for example, an oval, round or polygonal periphery having straight or curved connections between the points of the polygon. Preference is given to a round or equilateral polygonal cross section.

- 5 Preferably, all channels in the body have the same geometry (cross section and length) and run parallel to one another.

The term "tube bundle reactor" describes combined parallel arrangements of a multiplicity of channels in the form of tubes, with the tubes being able to have any desired cross section. The tubes are disposed in a fixed  
10 spatial relationship to one another, are preferably spatially separated from one another and are preferably enclosed by a housing or shell which includes all tubes. Through this, for example, a heating medium or cooling medium can be passed through the shell, so that all tubes are tempered uniformly.

The term "block of a solid material" describes a substrate made of a  
15 solid material (which in turn can be made up of one or more starting materials) which has the channels, for example in the form of boreholes. The geometry of the channels (boreholes) can be selected freely, as described in general for the channels above. The channels (boreholes) need not be introduced by drilling, but can be left, for example even during moulding of the solid body/block, for instance  
20 by extrusion of an organic and/or inorganic moulding composition (for example by an appropriate nozzle geometry during extrusion). In contrast to the tube bundle reactors or heat exchangers, the space in the body between the channels in the block is always filled by the solid material. Preferably, the block is made up of one or more metals.

25 The term "predetermined" means that, for example, a number of different or identical building blocks, for example catalysts or catalyst precursors, are introduced to, for example, a tube bundle reactor or heat exchanger in such a manner that the assignment of the respective building blocks, for example catalysts or catalyst precursors, to the individual tubes is recorded and can be retrieved later,  
30 for example when determining useful properties, for example activity, selectivity and/or long-term stability of the individual building blocks, for example catalysts, in order to enable clear assignment of defined measured values to defined building blocks. Preferably, the building blocks are prepared and distributed onto the different sections under computer control, the respective composition of a building

- 9 -

block and the position of the section in the substrate, for example tube bundle reactor, into which the catalyst or catalyst precursor is introduced being stored in the computer and being able to be retrieved later. The term "predetermined" thus serves for differentiation from a statistical or random distribution of the individual building blocks among the substrate sections.

Thus the present invention relates in particular to a process of the type in question here, which is characterized in that the substrate is a tube bundle reactor or heat exchanger and the regions are channels, preferably tubes, or the substrate is a block of a solid material which has regions, preferably channels.

In addition, the at least two individual building blocks have preferably useful properties and further preferably are heterogeneous catalysts and/or precursors thereof, further preferably inorganic heterogeneous catalysts and/or precursors thereof and in particular solid catalysts or supported catalysts and/or precursors thereof. They are present here preferably in each case as catalyst bed, tube-wall coating or auxiliary coating. In the context of the present processes the individual building blocks can be identical or different from one another. If they are different from one another, the selected reaction conditions during the reaction can be identical or different; if the building blocks are identical, preferably the reaction conditions are different in the individual regions.

#### Step (i)

The material libraries and/or the individual building blocks present therein may be prepared, as described in general terms below, with reference being made with respect to further details to WO 99/19724, WO 96/11878 and WO 99/41005. In detail, the following methods may be mentioned:

Processes for applying thin films, for example electron beam vaporization, sputtering, thermal vaporization, plasma vaporization, molecular beam epitaxy, precipitation from the gaseous phase, precipitation by a modulatable laser; co-precipitation and impregnation; impregnation of suitable support materials, for example porous silicon dioxide or aluminium oxide, which previously have each been introduced into the substrate sections. The active component(s) can be applied by introducing solutions, suspensions or pastes, each of which comprise the active component(s) or one or more suitable compounds

- 10 -

thereof. With respect to the supports which can be used, there are no restrictions, reference here in particular being made to porous and monolithic supports.

In addition, it is also possible to prepare material libraries which comprise homogeneous building blocks, for example homogeneous catalysts. For this purpose, for example, organometallic or inorganometallic compounds and/or any desired complex molecules, for example enzymes, are used, employing a suitable device, for example a suitable pipette having a plurality of channels in order to introduce the building blocks into the appropriate sections separated from one another.

In particular, the material libraries studied according to the invention may be prepared by the following procedures which are described by way of example with reference to the inorganic heterogeneous catalysts and/or precursors thereof also preferably used in the context of the present invention. Reference is made to WO 99/41005 with respect to further details of the procedures (a) to (f) described below.

Procedure (a) comprises the following steps:

- a1) Production of solutions, emulsions and/or dispersions of elements and/or element compounds of the elements present in the catalyst and/or catalyst precursor, and if appropriate of dispersions of inorganic support materials,
- a2) if appropriate introduction of adhesion promoters, binders, viscosity regulators, pH-regulating agents and/or solid inorganic supports into the solutions, emulsions and/or dispersions,
- a3) simultaneous or sequential coating of the substrate channels with the solutions, emulsions and/or dispersions, a predetermined amount of the solutions, emulsions and/or dispersions being introduced into each channel in order to obtain a predetermined composition, and

- 11 -

- a4) if appropriate heating the coated body, in the presence or absence of inert gases or reactive gases, to a temperature in the range from 20 to 1500°C for drying and if appropriate sintering or calcining the catalysts and/or catalyst precursors.

5

Procedure (b) comprises the following steps:

- b1) Production of solutions, emulsions and/or dispersions of elements and/or element compounds of the elements present in the catalyst and/or catalyst precursor, and, if appropriate, of dispersions of inorganic support materials,
- b2) if appropriate introduction of adhesion promoters, binders, viscosity regulators, pH-regulating agents and/or solid inorganic supports into the solutions, emulsions and/or dispersions,
- b3) simultaneous or sequential coating of the catalyst supports present in the substrate channels with the solutions, emulsions and/or dispersions, a predetermined amount of the solutions, emulsions and/or dispersions being introduced into each channel in order to obtain a predetermined composition on the catalyst supports, and
- b4) if appropriate heating the substrate together with the coated catalyst supports in the channels, in the presence or absence of inert gases or reactive gases, to a temperature in the range from 20 to 1500°C for drying and if appropriate sintering or calcining the catalysts and/or the catalyst precursors.

30

Procedure (c) comprises the following steps:

- c1) Production of solutions, emulsions and/or dispersions of elements and/or element compounds of the chemical elements

- 12 -

present in the catalyst and/or catalyst precursor, and if appropriate of dispersions of inorganic support materials,

- 5                   c2)       mixing predetermined amounts of the solutions, emulsions and/or dispersions and if appropriate precipitation aids in one or more reaction vessels operated in parallel,
- 10                   c3)       if appropriate introduction of adhesion promoters, binders, viscosity regulators, pH-regulating agents and/or solid inorganic support materials into the resultant mixture(s),
- 15                   c4)       coating one or more predetermined channels of the substrate with the mixture or a plurality of mixtures,
- c5)       repeating steps c2) to c4) for other substrate channels until the channels are coated with the respectively predetermined catalyst compositions and/or catalyst precursor compositions,
- 20                   c6)       if appropriate heating the coated substrate, in the presence or absence of inert gases or reactive gases, to a temperature in the range from 20 to 1500°C for drying and, if appropriate, sintering or calcining the catalysts and/or catalyst precursors.

Preferably, the procedure comprises the following steps:

- 25                   c1)       Production of solutions of element compounds of the chemical elements present in the catalyst except for oxygen, and, if appropriate, of dispersions of inorganic support materials
- 30                   c2)       mixing predetermined amounts of the solutions or dispersions and, if appropriate, precipitation aids in one or more reaction vessels operated in parallel with precipitation of the chemical elements present in the catalyst,

- 13 -

- 5
- c3) if appropriate introduction of adhesion promoters, binders, viscosity regulators, pH-regulating agents and/or solid inorganic supports into the resultant suspension,
- c4) coating one or more predetermined tubes of the tube bundle reactor or heat exchanger with the suspension,
- 10 c5) repeating steps c2) to c4) for different tubes of the tube bundle reactor or heat exchanger until the tubes are coated with the respectively predetermined catalyst compositions,
- 15 c6) heating the coated tube bundle reactor or heat exchanger, in the presence or absence of inert gases or reactive gases, to a temperature in the range from 20 to 1500°C for drying and, if appropriate, sintering or calcining the catalysts.

Procedure (d) comprises the following steps:

- 20 d1) Production of solutions, emulsions and/or dispersions of elements and/or element compounds of the chemical elements present in the catalyst and/or catalyst precursor, and, if appropriate, of dispersions of inorganic support materials,
- 25 d2) mixing predetermined amounts of the solutions, emulsions and/or dispersions and, if appropriate, precipitation aids in one or more reaction vessels operated in parallel,
- 30 d3) if appropriate introduction of adhesion promoters, binders, viscosity regulators, pH-regulating agents and/or solid inorganic supports into the resultant mixture(s),



- 14 -

- d4) coating catalyst supports present in one or more predetermined substrate channels with the mixture or one or more of the mixtures,
- 5 d5) repeating steps d2) to d4) for other (that is to say generally not yet coated) catalyst supports in the substrate channels until the (preferably all) catalyst supports present in the substrate channels are coated with the respectively predetermined (generally differing from one another) catalyst compositions and/or catalyst precursor compositions,
- 10
- d6) if appropriate heating the substrate, together with the coated catalyst supports in the channels, in the presence or absence of inert gases or reactive gases, to a temperature in the range from 20 to 1500°C for drying and, if appropriate, sintering or
- 15 calcining the catalysts and/or catalyst precursors.

In this case the adhesion strength of the channels (for example of the inner surface of the tubes) of the substrate or of the catalyst supports can be increased before the coating by chemical, physical or mechanical pretreatment of the inner walls of the channels (for example inner tubes) or of the catalyst supports or by applying an adhesion layer. This relates in particular to the procedures (a) and (c), and (b) and (d), respectively.

20

25 Procedure (e) comprises the following steps:

- e1) Production of different heterogeneous catalysts and/or their precursors in the form of solid catalysts having a predetermined composition,
- 30
- e2) charging in each case one or more predetermined substrate channels which are secured against the heterogeneous catalysts falling out with in each case one or more of the

- 15 -

heterogeneous catalysts and/or their precursors having a predetermined composition,

- 5 e3) if appropriate heating the body together with the heterogeneous catalysts and/or precursors thereof in the channels, in the presence or absence of inert gases or reactive gases, to a temperature in the range from 20 to 1500°C for drying and, if appropriate, sintering or calcining the catalysts and/or catalyst precursors.

10 Procedure (f) comprises the following steps:

- 15 f1) coating and, if appropriate, heating predetermined catalyst supports for producing predetermined supported catalysts in the manner defined above in process b) or d) outside the body,
- f2) introducing the supported catalysts into predetermined substrate channels,
- 20 f3) if appropriate heating the charged substrate, in the presence or absence of inert gases or reactive gases, to a temperature in the range from 20 to 1500°C for drying and, if appropriate, sintering or calcining the catalysts.

25 Preferably, here, the external shape of the supported catalysts corresponds to the shape of the channel interior in the body, at least substantially, preferably approximately or completely.

The procedures outlined above are suitable for preparing a multiplicity of catalyst systems, as described, for example, in G. Ertl, H. Knözinger, J. Weitkamp, Editors "Handbook of Heterogeneous Catalysis", Wiley - VCH, 30 Weinheim, 1997.

With respect to further details regarding the production of a material library according to (i) of the inventive process, reference is made to the section "Production of the inorganic heterogeneous catalyst arrays" of WO 99/41005. In

- 16 -

this section, the production of a material library (there termed "array") is described in detail with reference to producing a material library of inorganic heterogeneous catalysts. The content of this section of WO 99/41005 is, moreover, incorporated in its entirety in the context of the present invention by reference. Obviously, the concept described there may also be applied to other building blocks, for example homogeneous catalyst systems, in particular organometallic systems, organic substances, for example pharmacological active compounds, polymers, composite materials, in particular those made of polymers and inorganic materials. In principle, the inventive process is applicable to all technical areas in which formulations, that is to say compositions having more than one constituent, are produced and are studied for their useful properties. Fields of application outside material research are, for example, drug formulations, formulations of foods and food supplements, feeds and cosmetics.

Accordingly, the present invention is not restricted to determining the useful properties of certain catalyst materials and catalyst compositions. The production of the abovementioned mixtures can be carried out here in parallel or sequentially and is generally carried out in automated form, for example using an automated pipetting system or pipetting robot, by inkjet processes, as described, for example, in US 5,449,754, and automated sputtering or electrolysis processes.

In addition to the procedures (a) to (f) described above, obviously, it is also possible to prepare different heterogeneous catalysts in the form of solid catalysts or supported catalysts by known processes, for example combinatorial processes, having a predetermined composition and charging in each case one or more predetermined sections, preferably tubes of a tube bundle reactor or heat exchanger or tubes or auxiliary supports introduced into these, with each of these prefabricated heterogeneous catalysts.

#### Step (ii)

The chemical or physical, or chemical and physical, conversion of the starting material in the at least two substrate sections which are separated from one another, with an effluent stream comprising at least one conversion product being obtained, according to step (ii) can be carried out as follows.

- 17 -

Firstly, if necessary, the catalyst can be activated in the substrate. This can be carried out by thermal treatment under inert gases or reactive gases or other physical and/or chemical treatments.

The substrate is then brought to a desired reaction temperature and then  
5 a fluid starting material, which can be a single compound or a mixture of two or more compounds, is passed through or along one, a plurality of, or all the sections, preferably channels, of the substrate.

The fluid starting material consisting of one or more reactants is generally in the liquid state, or preferably in the gaseous state. Preferably,  
10 oxidation catalysts, for example, are tested by parallel or sequential charging individual, a plurality, or all sections, preferably tubes of a coated tube bundle reactor, with a gas mixture comprising one or more saturated, unsaturated or polyunsaturated organic starting materials. Those which may be mentioned in this case are, for example, hydrocarbons, alcohols, aldehydes etc., and oxygen-  
15 containing gases, for example air, O<sub>2</sub>, N<sub>2</sub>O, NO, NO<sub>2</sub>, O<sub>3</sub> and/or, for example, hydrogen. Furthermore, an inert gas, for example nitrogen or a noble gas, may also be present. The reactions are generally carried out at temperatures of from 20 to 1200°C, preferably from 50 to 800°C, and in particular from 80 to 600°C, the parallel or sequential separate removal of the respective gas streams from  
20 individual, a plurality of, or all sections being ensured by means of a suitable device.

The resultant effluent stream comprising at least one reaction product is then collected either from individual substrate sections or a plurality of substrate sections and preferably analysed separately, sequentially or preferably in parallel,  
25 if analysis of the effluent stream after the inventive processes is required for the respective section.

A plurality of reactions, in each case interrupted by a purge step with a purge gas, can be carried out sequentially at the same or different temperatures and analysed. Obviously, identical reactions at different temperatures are also possible.

30 Preferably at the start of the process, the collected effluent stream of the entire library is analysed in order to establish whether a reaction is taking place at all. In this manner, groups of building blocks may be analysed very rapidly as to whether they have any useful properties, for example catalytic properties, at all. Obviously, after carrying out this "coarse screening", individual groups of building

- 18 -

blocks may in turn be analysed together in order to establish in turn which group of building blocks, if there are a plurality of such groups of building blocks present in the material library, have catalytic properties.

The invention permits the automated preparation and catalytic testing for  
5 the purpose of mass screening of, for example, heterogeneous catalysts for chemical reactions, in particular for reactions in the gas phase, very particularly for partial oxidations of hydrocarbons in the gas phase with molecular oxygen (gas-phase oxidations).

Reactions or conversions suitable for study are described in G. Ertl, H.  
10 Knözinger, J. Weitkamp, Editor, "Handbook of Heterogeneous Catalysis", Wiley - VCH, Weinheim, 1997. Examples of suitable reactions are principally listed in this reference in volumes 4 and 5 under numbers 1, 2, 3 and 4.

Examples of suitable reactions are the decomposition of nitrogen oxides, the synthesis of ammonia, the oxidation of ammonia, oxidation of hydrogen  
15 sulphide to sulphur, oxidation of sulphur dioxide, direct synthesis of methylchlorosilanes, oil refining, oxidative coupling of methane, methanol synthesis, hydrogenation of carbon monoxide and carbon dioxide, conversion of methanol to hydrocarbons, catalytic reforming, catalytic cracking and hydrocracking, coal gasification and liquefaction, fuel cells, heterogeneous  
20 photocatalysis, synthesis of ethers, in particular MTBE and TAME, isomerizations, alkylations, aromatizations, dehydrogenations, hydrogenations, hydroformylations, selective or partial oxidations, aminations, halogenations, nucleophilic aromatic substitutions, addition and elimination reactions, dimerizations, oligomerizations and metathesis, polymerizations, enantioselective catalysis and biocatalytic  
25 reactions and for material testing, and, in this case, in particular for determining interactions between two or more components on surfaces or substrates, in particular in the case of composite materials.

The effluent streams of the respectively selected sections comprising at least one reaction product and/or the starting material which is preferably obtained  
30 separately from the individual sections are preferably removed via a device which is connected gas-tightly to the respective sections. In particular those which may be mentioned are sample removal using suitable flow guidance, for example valve circuits and mobile capillary systems (sniffing apparatus). In this manner the

- 19 -

individual effluent streams of the individual, plurality of, or all sections can be removed separately and then analysed separately via a valve circuit.

The, for example, computer-controlled mechanically movable "sniffing apparatus" comprises a sniffing line or sniffing capillary for the effluent stream to  
5 be taken off which is positioned essentially automatically on, in/or above the exit of the respective section and then takes off the effluent stream. Details with respect to the arrangement of such a "sniffing apparatus" may also be taken from WO 99/41005 which has been cited repeatedly above.

10 Step (iii)

The measurement of the first parameter under step (iii) is carried out at all sections.

In principle, there is freedom of choice of the measurement method, but  
15 it should be in this case a relatively rapid and simple measurement method, since a great number of sections must be analysed. The purpose of this first measurement is preselection of those sections which are to be analysed under step (iv).

The preferred measurement method which may be mentioned is infrared thermography which may be accomplished simply using an infrared camera. In  
20 this case the temperature development of the individual sections may be taken from the infrared image recorded, preferably using digital image processing. In case of a small number of sections, if appropriate, a temperature sensor may be assigned to each individual section, for example a pyrometric element or a thermocouple. The results of temperature measurement for the individual sections  
25 can all be passed to a data processing system, which preferably controls the inventive process.

In order to eliminate substantially interfering environmental effects, the substrate together with the sections to be tested should preferably be situated in a thermally insulated housing having a controlled atmosphere. If an infrared camera  
30 is used, this should preferably be situated outside the housing, observation of the substrate being enabled by infrared-transparent windows, in particular made of sapphire, zinc sulphide, barium difluoride, sodium chloride etc. On the basis of the results of measurement of the first parameter, using a data processing system or a computer, those sections are selected from which the second parameter is to be

- 20 -

measured. In this case various selection criteria are conceivable. Firstly, those sections can be selected for which the first parameter is "better" than a predetermined limit value, or secondly, the "best" x% of all sections on a substrate can alternatively be selected for measuring the second parameter. The said  
5 minimum requirements or the number of sections to be selected depends firstly on the respective quality requirements of the materials to be tested and secondly on the time which is available for testing a substrate.

If there is a limit value with respect to the minimum requirement of the first measured value, this need not be constant for all sections of a substrate, but it  
10 can, for example, be predetermined as a function of other properties of the respective building components for the individual sections.

Step (iv)

15 The measurement of the at least one further parameter is preferably carried out on the effluent stream of the selected sections. In principle the further sensor is not subject to any restrictions provided that it is suitable for measuring a further parameter which gives indications of a further property of the building block under test.

20 Preferably, the further sensor is based on a spectroscopic method which is selected from the group comprising mass spectrometry, gas chromatography, a combination of these two techniques, Raman spectroscopy and Fourier transformation (FT-IR) spectroscopy.

On the basis of these preferred methods, more precise information on the  
25 effluent stream of the respective sections or building blocks may be obtained. Using these spectroscopic methods, the concentration of a desired product, or the concentration of parallel products and the residual concentration of the starting materials can be determined, from which, for example, for catalytic building blocks, information on selectivity may be derived.

30 For mass spectroscopy, preferably a quadrupole mass spectrometer is used, although TOF mass spectrometers (real-time mass spectrometers) are conceivable. The effluent stream of the sections under test is fed to the mass spectrometer, or other sensors, preferably via a conduit system, with this being, in

- 21 -

particular, a sniffing capillary, which is positioned in the effluent stream of the respective sections using an XYZ robotic system.

For optical systems such as Raman spectrometers and FT-IR spectrometers, it is conceivable that light is directed onto each of the sections under test and is received from each of the sections under test using scanning mirrors.

The present invention will now be described in detail with reference to the accompanying drawings, in which

- 10 Fig 1 shows a diagrammatic arrangement of a first exemplary embodiment of the inventive apparatus; and  
Fig. 2 shows a diagrammatic view of a second exemplary embodiment of the inventive apparatus.

15 The inventive apparatuses 10; 110 each have a housing 11; 111, which is provided with at least one heater (not shown) in order to control the temperature in the housing.

The cylindrical housing 11; 111 has a planar support which is constructed as a wire grid or foamed ceramic 14; 114 and in which parallel  
20 cylindrical sections 13; 113 are arranged for receiving the building blocks. In the embodiment shown in Figure 1, the starting material gas is introduced above the support into the entire volume above sections 13 and can flow downwardly through the sections, the exhaust gas leaving the housing at an outlet (which is not shown). In contrast thereto, in the case of the apparatus 110 shown in Figure 2, the  
25 starting material gas is passed specifically by means of a conduit system 112 below the respective cylindrical sections 113. The gas then flows through the cylindrical sections, and if appropriate the planar support 114, the reaction products or the remaining starting material leaving the upper housing part as exhaust gas through an outlet (which is not shown).

30 The exemplary embodiments shown have as first sensor an infrared camera which is positioned so that it can determine simultaneously the temperature of all cylindrical sections. For this purpose the temperature values in the temperature distribution recorded as an image are each assigned to the sections whose position corresponds to an image region.



- 22 -

The assignment can be made according to varying criteria. On the one hand, the temperature of each section can be retrieved by determining the temperature in each image region which corresponds to a section position. On the other hand, the temperature distribution observed in the image can also be used as a starting point, with the associated sections only being determined for temperature values of "interest", for example extreme values or values within or below or above one or two threshold values. The second procedure is recommended, in particular, for systems having a large number of sections in which only "particularly promising" sections are to be studied further.

The infrared camera 30 is preferably positioned outside the housing in order to protect it from the starting materials and products in the housing. Observation of the substrate even from outside the housing is possible via an infrared-transparent window 15, for example a sapphire disc. Other suitable materials for the disc are calcium fluoride, barium fluoride, zinc sulphide etc. As a second sensor, a mass spectrometer (not shown) is provided, to which the effluent stream from selected sections is fed via a capillary 20; 120.

The upper layer of the substrate 14; 114 preferably consists of a material whose emissivity properties ideally approach those of a black-body radiator, with particular preference being given to natural slate. In this manner, interference in the temperature measurement by the substrate is substantially eliminated.

The capillary for this purpose is positioned via an XY robot or an XYZ robot (not shown) with its intake orifice in each case in the effluent stream of a selected section.

The robot is controlled via the data processing system (not shown), which selects the sections for the second measurement on the basis of the measured results of the first measurement.

The above-described combination of an integral analytical method which may be employed with relatively low expenditure to a multiplicity of samples or sections with a more precise or more complex analytical method which, however, is only carried out for selected sections, allows, for example, in the development of catalysts, the activity and selectivity of materials having promising activity to be determined very rapidly and effectively.

- 23 -

Finally, reference may also be made to the fact that what is termed the "sniffing capillary" would also be usable as a sample inlet system for other analytical techniques, for example chromatographic methods.

- Other expedient analytical combinations are IR thermography/GC-MS,
- 5 IR thermography/Raman spectroscopy, IR thermography/dispersive FT-IR spectroscopy, color detection using chemical indicator/MS, color detection using chemical indicator/GC-MS, color detection using chemical indicator/dispersive FT-IR spectroscopy and others.

- 24 -

hte AG

H32923US MR/HT/mas

**PATENT CLAIMS**

1. Process for determining useful properties of individual building blocks of a material library comprising a substrate having at least two individual building blocks in at least two sections which are separated from one another which comprises:
  - (iii) simultaneous measurement of first parameter at at least two, preferably all, sections with a first sensor, the first parameter giving an indication of a first property of the respective building blocks, and
  - (iv) measurement of at least one further parameter with at least one further sensor, the further parameter giving an indication of a further property of the respective building blocks.
2. Process according to Claim 1, characterized in that the at least one further parameter is measured only for a selected group of sections, the choice of a section for measuring the at least one further parameter depending on the respective result of the measurement of the first parameter.
3. Process according to either Claim 1 or 2, which comprises the following further preceding step (i):
  - (i) generating a material library comprising a substrate having at least two individual building blocks in at least two different substrate sections which are separated from one another.
4. Process according to one of Claims 1 to 3, which comprises the following further step (ii) before step (iii) and, if it is carried out, after step (i):
  - (ii) introduction of at least one starting material into at least two substrate sections which are separated from one another of a material library for

- 25 -

5 carrying out a chemical or physical or chemical and physical conversion of the starting material in the at least two substrate sections separated from one another, in each case in the presence of the corresponding building block, obtaining in each case an effluent stream containing at least one conversion product and/or starting material.

10 5. Process according to one of the preceding claims, the sections for the further measurement being automatically selected by a data processing system.

6. Process according to one of the preceding claims, characterized in that the first parameter is a temperature or a temperature change, and infrared thermography via the sensor makes possible measurement of the temperature or temperature changes, or the temperature of the individual sections is measured in  
15 each case via one thermocouple.

7. Process according to one of the preceding claims, characterized in that the first sensor is an infrared camera which determines the temperature of the sections in an integrated manner.

20 8. Process according to one of the preceding claims, characterized in that the first sensor is based on color detection using a chemical indicator.

9. Process according to one of the preceding claims, characterized in  
25 that the further parameter is measured in each case in the effluent stream of the selected sections.

10. Process according to one of the preceding claims, characterized in that at least the at least one further sensor is based on a method which is selected  
30 from the group comprising mass spectrometry, gas chromatography, gas chromatography/mass spectroscopy, Raman spectroscopy, FT-IR spectroscopy.

11. Process according to Claim 10, with the respective effluent stream of the selected sections being passed to the at least one further sensor via a conduit, in

- 26 -

particular a sniffing capillary, which is positioned in the effluent stream of the selected sections by means of suitable drive means.

12. Process according to Claims 5 and 11, the drive means being  
5 controlled automatically by the data processing system.

13. Process according to one of the preceding claims, characterized in that the substrate is a tube bundle reactor or heat exchanger and the sections are channels, preferably tubes, or the substrate is a block of a solid material which has  
10 sections, preferably channels.

14. Process according to one of the preceding claims, characterized in that the at least two individual building blocks have catalytic properties, preferably are heterogeneous catalysts and/or precursors thereof, further preferably are  
15 inorganic heterogeneous catalysts and/or precursors thereof, and in particular are solid catalysts or supported catalysts and/or precursors thereof, and are present in each case as catalyst bed, tube-wall coating or auxiliary support coating.

15. Process according to Claim 14, characterized in that the first  
20 property is the respective activity of the building blocks.

16. Process according to either of Claims 14 or 15, characterized in that the second property is the respective selectivity of the building blocks.

25 17. Process according to one of the preceding claims, characterized in that the reaction is selected from:

decomposition of nitrogen oxides, the synthesis of ammonia, the oxidation of ammonia, oxidation of hydrogen sulphide to sulphur, oxidation of sulphur dioxide,  
30 direct synthesis of methylchlorosilanes, oil refining, oxidative coupling of methane, methanol synthesis, hydrogenation of carbon monoxide and carbon dioxide, conversion of methanol to hydrocarbons, catalytic reforming, catalytic cracking and hydrocracking, coal gasification and liquefaction, heterogeneous photocatalysis, synthesis of ethers, in particular MTBE and TAME, isomerizations,

- 27 -

alkylations, aromatizations, dehydrogenations, hydrogenations, hydroformylations, selective or partial oxidations, aminations, halogenations, nucleophilic aromatic substitutions, addition and elimination reactions, dimerizations, oligomerizations and metathesis, polymerizations, enantioselective catalysis and biocatalytic  
5 reactions.

18. Apparatus for carrying out the process according to one of Claims 1 to 17, comprising:

- 10 (1) means for receiving at least two individual building blocks, comprising a substrate having at least two different sections which are separated from one another,  
(2) means for introducing at least one starting material,  
(3) a first sensor for measuring a first parameter,  
15 (4) at least one further sensor for measuring a second parameter, characterized in that  
(5) the apparatus further comprises a data processing device which selects the sections for measuring the at least one further parameter on the basis of the results of measurement of the first parameter according to criteria which  
20 can be determined in advance.

19. Apparatus according to Claim 18, characterized in that the first sensor is an infrared camera.

25 20. Apparatus according to Claim 18 or 19, characterized in that the at least one further sensor is based on a method which is selected from the group comprising mass spectrometry, gas chromatography, gas chromatography/mass spectroscopy, Raman spectroscopy, FT-IR spectroscopy.

30 21. Apparatus according to Claim 20, in which the further sensor is a quadrupole mass spectrometer.

22. Apparatus according to one of Claims 18 to 21, further comprising a sniffing capillary for feeding the effluent stream of a section to the at least one

- 28 -

further sensor and drive means for positioning the sniffing capillary for receiving the effluent stream of one section under study.

23. Apparatus according to Claims 18 to 22, in which the substrate  
5 contains a planar arrangement having a wire grid or foamed ceramic.

24. Apparatus according to one of Claims 18 to 23, further comprising a housing in which the substrate is disposed.

10 25. Apparatus according to Claim 24, in which the apparatus comprises means for heating the housing and/or means for cooling the housing.

26. Apparatus according to Claim 19, 24 or 25, characterized in that the housing contains an IR-transparent window, and in that the infrared camera is  
15 arranged outside the housing in front of the IR-transparent window.

- 29 -

hte AG

H32923US MR/HT/mas

FIG. 1


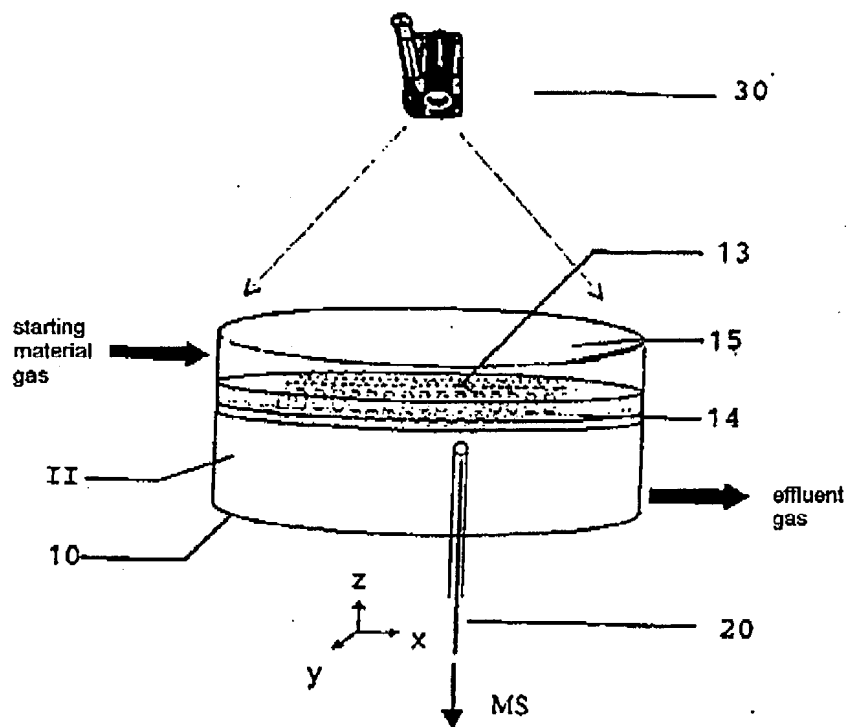


FIG. 1



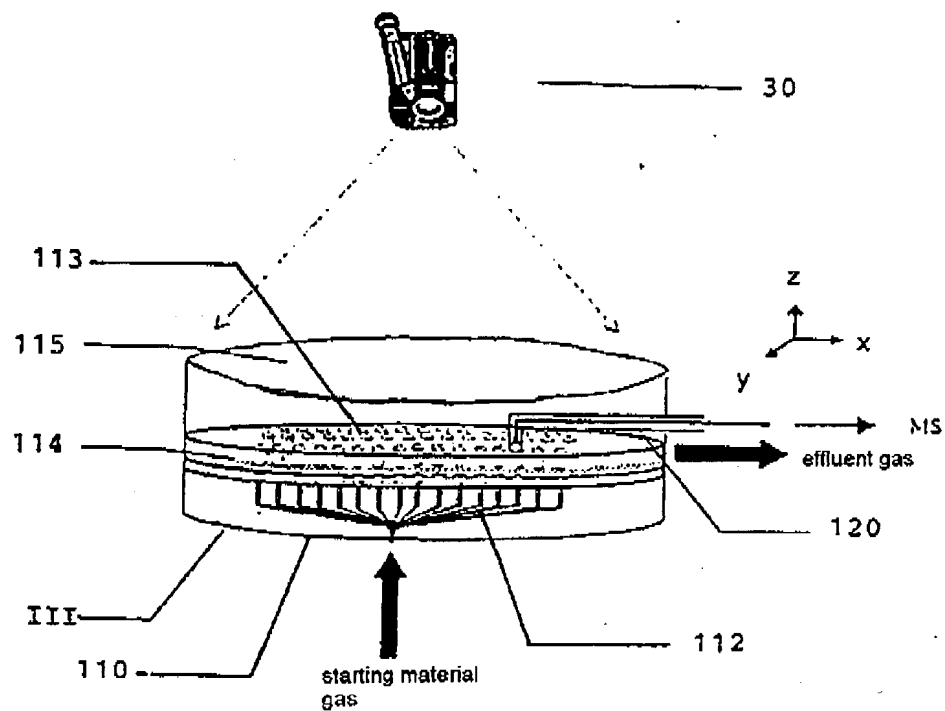

- 30 -

hte AG

H32923US MR/HT/mas

**ABSTRACT**

A process is disclosed for testing material libraries, in particular catalysts, by means of coupled use of at least two analytical methods, preferably IR thermography and mass spectrometry. Owing to the selected arrangement, the disadvantages of the two previously known individual methods are compensated for: the subsequent selectivity determination for selected sections by means of mass spectrometry invalidates the argument against IR thermography, of only being able to determine activities; the rapid integrated determination of potentially "good" materials via IR thermography prevents an excessive loss of time by needing to test all materials of a library successively with the mass spectrometer.

The reactor design permits, firstly, the integral recording of the entire reactor through a window which is transparent for the corresponding method and, secondly, permits the simultaneous, automated application of a second analytical method (for example mass spectrometry) to selected materials of a material library, which have been rated as active by the optical method. In the case described, the optical method provides information on the material activity for a set problem, and the second analytical method determines the selectivity of the materials.

(Figure 1)